

IMV VIBRATION TEST SYSTEMS

J series

Air cooled Vibration Test Systems

J250 / SA5AM EM2505A

J

Long duration shock tests require high velocity and large displacement. J-series is a high-frequency system that offers usability and durability furnished with functions that accommodates high velocity and displacement testing.

[Expanded maximum test range]

Max. velocity of Sine force: 2.4 m/s • Max. velocity of Shock force 4.6 m/s • Max. displacement: 100 mmp-p

[Patented upper (armature) support system PS Guide] Parallel Slope Guide is standard.

[Low noise] Optimised design of the air intake based on fluid dynamics has reduced the air-intake noise.

[All models can be directly coupled to a climatic chamber.]



① High Velocity and Large Displacement

High velocity of 2.4 m/s and Large displacement of 100 mmp-p (4 inch).



■ PSG guide system

② Improvement of Testing Environment

With the operation of Intelligence Shaker Management (ISM), EM range can reduce power consumption and CO2 emissions automatically.

eco-shaker

② User first principle

Compatible with K2 vibration controller. Intuitive interface leads The operator with user-friendly guidance.



IMV CORPORATION

J250 / SA5AM EM2505A





System Specifications			
System Model		J250/SA5AM	EM2505A
Frequency Range (Hz)		0-2200	
Rated Force	Sine (kN)	35	
	Random (kN rms) *1	35	
	Shock (kN)	70	
Maximum Acc.	Sine (m/s ²)	777	
	Random (m/s ² rms)	544	
	Shock (m/s ²)	1555	
Maximum Vel.	Sine (m/s)	2.4	
	Shock (m/s peak)	2.4	2.4(3.5)*3
Maximum Disp.	Sine (mmp-p)	100	
	Maximum Travel (mmp-p)	120	

Vibration Generator (J250)	
Armature Mass (kg)	45
Armature Diameter (φ mm)	440
Armature Resonance (Hz)	1700
Allowance Eccentric Moment (N·m)	1550
Maximum Payload (kg)	600
Mass (kg)	3500

Cooling Blower		
Model		VAPE 710/P2R
Mass (kg)		250
Environmental Data		
Power Requirement (kVA) *2		53
Input Voltage Supply (3 φ, V)		380/400/415/440
Compressed Air Supply (Mpa)		0.6
Working Ambient	Temperature (°C)	0 - 40
	Humidity (%RH)	0 - 85


Power Amplifier		
System Model		SA5AM-J50 SA5AM-J50EM
Maximum Output [kVA]		50 50
Mass [kg]		880 930

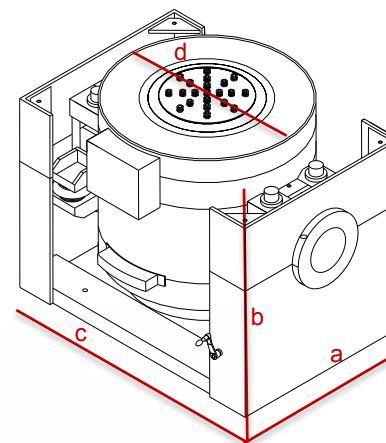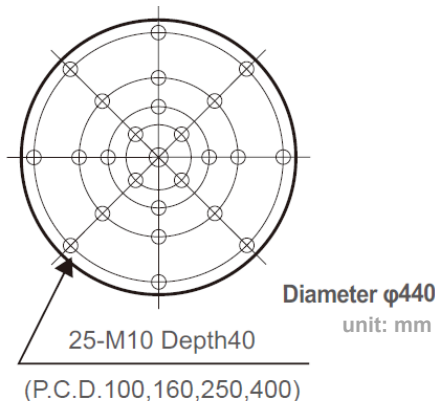

Shaker

Model: J250

a: W 1463 mm
b: H 1301 mm
c: D 1100 mm
d: 860 φmm

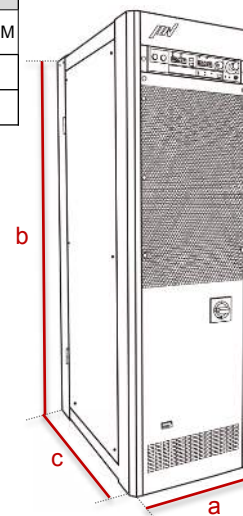

Amplifier

Model: SA5AM-J50

a: W 580 mm
b: H 1950 mm
c: D 850 mm

Model: SA5AM-J50EM

a: W 1160 mm
b: H 1950 mm
c: D 850 mm



Blower

Model: VAPE 710/P2R

a: W 1160 mm
b: H 2405 mm
c: D 787 mm

*1) Random force ratings are specified in accordance with ISO5344 conditions.
*2) Power supply: 3-phase 380/400/415/440 V, 50/60 Hz. A transformer is required for other supply voltages.
*3) Maximum velocity 4.6 m/s. High velocity restricts maximum Shock force.
Please contact IMV or your local distributor with specific test requirements.
* The specification shows the maximum system performance.
For long-duration tests, de-rating by up to 70 % must be applied.
Continuous use at maximum levels may cause failure.
* In the case of Random vibration test, please set the test definition of the peak value of acceleration waveform to be operated less than the maximum acceleration of Shock.
* Frequency range values vary according to sensor and vibration controller.